


HYBRID STEPPING MOTOR 57SHY4001-2A


Casun®

General specification		Electrical specification	
Step angle	1.8°	Rated voltage	2.8V
Number of phase	2	Rated current	0.8A
Insulation resistane	100MΩmin. (500V DC)	Resistance per phase	3.5Ω ± 10%
Insulation class	Class B	Inductance per phase	1.8mH ± 20%
Rotor inertia	15g.cm ²	Holding torque	60mN.m
Mass	75g	Detent torque	8mN.m

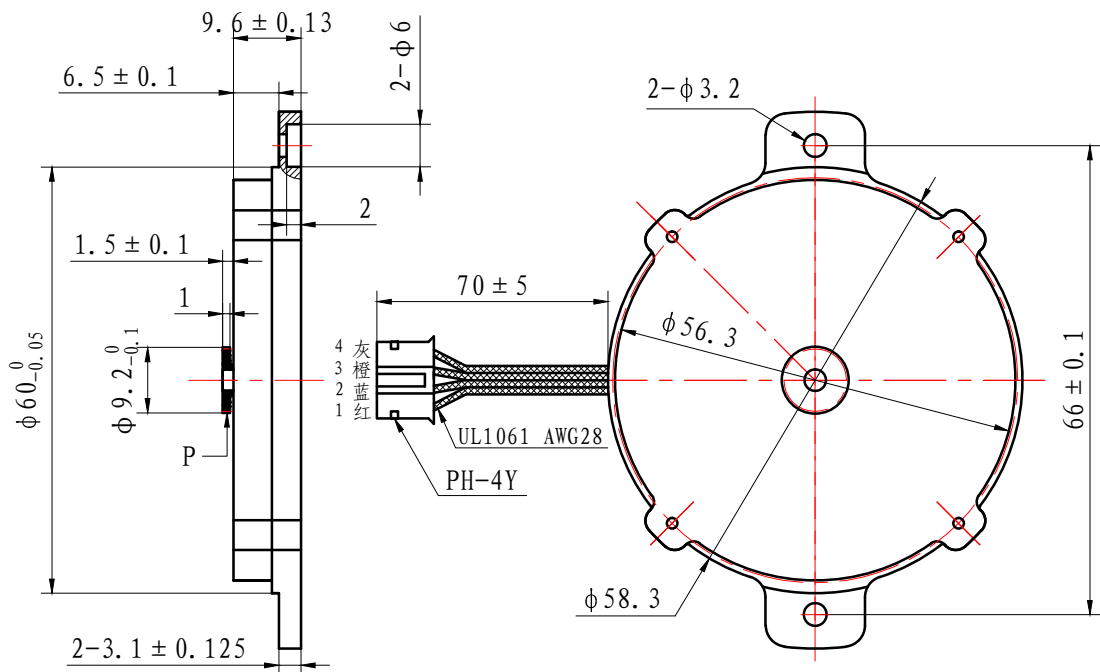

57SHY4001-2A

Wiring diagram



Note:

Part-P	
Number of teeth	21
Module	0.4
P.ROFILE angle	20°

				广州福得电子科技有限公司 GUANGZHOU FUDE ELECTRONIC TECHNOLOGY CO.,LTD		
A1	出线长度60更改为70					
A0				57SHY4001-2A型步进 电动机规格书		
版本	更改内容	签字	日期	图样标记	重量	比例
设计		标准化				
		批准				
审核						
工艺		日期		共 1 张	第 1 张	
						FT3.162.163