

UB Series

Silicone Coated Power Resistors



- Resistances from 0.005 to 260kOhms
- Power Rating 1 to 18Watts
- Resistance Tolerances to $\pm 0.01\%$
- Low TCR: $\pm 20\text{ppm/K}$ Standard
- MIL-R-26 / MIL-R-39007 Power Ratings
- Temperature Range: -55°C to $+350^{\circ}\text{C}$ ("V" Rating)
- Non-Inductive Windings Available

SPECIFICATIONS


Type	Wattage Rating (Watts)		Maximum Ohms ²	Dimensions			Maximum Working Voltage	MIL-R-26 / MIL-R-39007 Style
	U	V		A $\pm 0.062''$ [$\pm 1.6\text{mm}$]	B $\pm 0.031''$ [$\pm 0.8\text{mm}$]	C ¹ $\pm 0.002''$ [$\pm 0.05\text{mm}$]		
UB-1	1	1.5	3.4k	0.250 [6.4]	0.085 [2.2]	0.020 [0.5] 0.025 [0.6]	33	RW-81 RWR-81
UB-2 ³	1.5	2	7.5k	0.312 [7.9]	0.078 [2.0]	0.020 [0.5] 0.025 [0.6]	42	RWR-82
UB-3	2	3	10k	0.406 [10.3]	0.094 [2.4]	0.025 [0.6] 0.020 [0.5]	80	RW-80 RWR-80
UB-5	4	5	25k	0.560 [14.2]	0.187 [4.7]	0.032 [0.8]	162	
UB-5C	5	7	32k	0.500 [12.7]	0.218 [5.5]	0.032 [0.8]	194	
UB-6	6	8	50k	0.625 [15.9]	0.250 [6.4]	0.040 [1.0]	258	
UB-10	7	10	95k	0.875 [22.2]	0.312 [7.9]	0.040 [1.0]	425	RW-84
UB-12	10	12	150k	1.220 [31.0]	0.312 [7.9]	0.040 [1.0]	607	
UB-15	15	18	260k	1.780 [45.2]	0.375 [9.5]	0.040 [1.0]	1050	

¹ Lead Diameter: 18 AWG = 0.040" / 20 AWG = 0.032" / 22 AWG = 0.025" / 24 AWG = 0.020"

Where more than one lead is listed / the top value is Standard

² For non-inductive windings / divide maximum resistance by 2

³ This part does not meet the RoHS directive - call factory for details

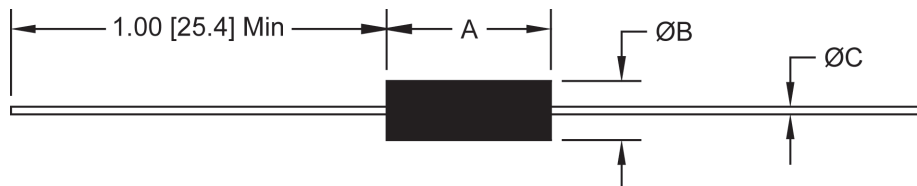

Ordering Information

For Non-Inductive Windings / insert the letter "N" (i.e. UBN-5)

Part Number - Resistance - Tolerance - TCR (If not standard)

Example: UB-3 10 Ohm 1%

UB Series

Silicone Coated Power Resistors



SPECIFICATIONS (continued)

Specification	Value																	
Tolerances	±0.01% to ±10% (1% Standard)																	
Temperature Coefficient	>10Ω : ±20ppm/K 1Ω to 10Ω : ±50ppm/K <1Ω : Call Factory																	
Temperature Range	-55°C to +250°C : Characteristic U -55°C to +350°C : Characteristic V																	
Dielectric Strength	500 VAC : UB-1 / UB-2 / UB-3 1000 VAC : All Others																	
Constuction	Centerless ground ceramic core Tinned copper or copperweld leads High temperature / trivalent / inorganic Silicone coating All welded terminations																	
Environmental Performance (MIL-STD 202)	ΔR																	
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%; text-align: center;">Characteristic U</th> <th style="width: 50%; text-align: center;">Characteristic V</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">±0.2% + 0.05Ω</td> <td style="text-align: center;">±0.2% + 0.05Ω</td> </tr> <tr> <td colspan="2" style="text-align: center;">to ±1% depending on size and Resistance Value</td> </tr> <tr> <td style="text-align: center;">±0.2% + 0.05Ω</td> <td style="text-align: center;">±2% + 0.05Ω</td> </tr> <tr> <td style="text-align: center;">±0.2% + 0.05Ω</td> <td style="text-align: center;">±2% + 0.05Ω</td> </tr> <tr> <td style="text-align: center;">±0.2% + 0.05Ω</td> <td style="text-align: center;">±2% + 0.05Ω</td> </tr> <tr> <td style="text-align: center;">±0.2% + 0.05Ω</td> <td style="text-align: center;">±2% + 0.05Ω</td> </tr> <tr> <td style="text-align: center;">±0.1% + 0.05Ω</td> <td style="text-align: center;">±0.2% + 0.05Ω</td> </tr> <tr> <td style="text-align: center;">±0.1% + 0.05Ω</td> <td style="text-align: center;">±0.2% + 0.05Ω</td> </tr> </tbody> </table>	Characteristic U	Characteristic V	±0.2% + 0.05Ω	±0.2% + 0.05Ω	to ±1% depending on size and Resistance Value		±0.2% + 0.05Ω	±2% + 0.05Ω	±0.2% + 0.05Ω	±2% + 0.05Ω	±0.2% + 0.05Ω	±2% + 0.05Ω	±0.2% + 0.05Ω	±2% + 0.05Ω	±0.1% + 0.05Ω	±0.2% + 0.05Ω	±0.1% + 0.05Ω
Characteristic U	Characteristic V																	
±0.2% + 0.05Ω	±0.2% + 0.05Ω																	
to ±1% depending on size and Resistance Value																		
±0.2% + 0.05Ω	±2% + 0.05Ω																	
±0.2% + 0.05Ω	±2% + 0.05Ω																	
±0.2% + 0.05Ω	±2% + 0.05Ω																	
±0.2% + 0.05Ω	±2% + 0.05Ω																	
±0.1% + 0.05Ω	±0.2% + 0.05Ω																	
±0.1% + 0.05Ω	±0.2% + 0.05Ω																	
Dielectric	±0.2% + 0.05Ω																	
Load Life	to ±1% depending on size and Resistance Value																	
Storage	±0.2% + 0.05Ω																	
Moisture Resistance	±0.2% + 0.05Ω																	
Thermal Shock	±0.2% + 0.05Ω																	
5X Overload (5s)	±0.2% + 0.05Ω																	
Shock	±0.1% + 0.05Ω																	
Vibration	±0.1% + 0.05Ω																	

